

VACUUM PLUG

A5QEVPD60

DESCRIPTION

Manufactured from aluminum, the A5QEVPD60 Aeroform vacuum plug is composed of 2 pieces. The upper part is associated with the lower part by a simple rotation $\frac{1}{4}$ turn.

A silicone seal placed between the two parts, ensures the sealing of your vacuum.

This vacuum plug is used in high temperature enclosures up to 230 ° C.

A QRC (Quick Release Coupling) $\frac{1}{4}$ gas can be provided with the vacuum plug *.

**upon request*



IDEAL FOR

- ✓ Autoclave
- ✓ Oven



ADVANTAGES

- ✓ Quick to set up
- ✓ Quick tightening by turning $\frac{1}{4}$ turn



TECHNICAL INFORMATION

- ✓ Base: 60 mm in diameter
- ✓ Thread: $\frac{1}{4}$ gas
- ✓ Using temperature: 230°C



OPTION

- ✓ Connector

References with QRC

	References				Material		Information
	A5QEVP	60mm	200°C	5Bars	Aluminium	$\frac{1}{4}$	QRC Brass
	A5QEVPX	60mm	230°C	5Bars	Aluminium	$\frac{1}{4}$	QRC Stainless Steel

VACUUM PLUG

A5QVPD65

DESCRIPTION


This Aeroform A5QPD65 vacuum plug is composed of 2 pieces. The upper part perforates the vacuum bag when it is positioned on the base.

A silicone seal placed between the two parts ensures the tightness of your vacuum.

This vacuum plug is used in high temperature enclosures up to 230 ° C.

A QRC (Quick Release Coupling) 1/4 gas can be provided with the vacuum plug *.

**upon request*

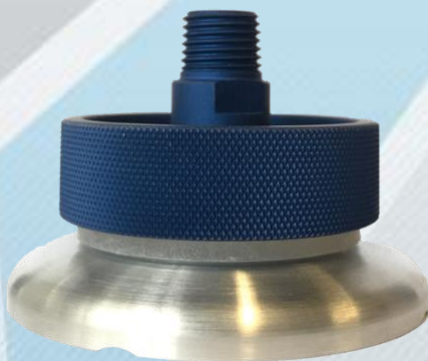

References for QRC

IDEAL FOR

- ✓ Autoclave
- ✓ Oven

ADVANTAGES

- ✓ Simple to set up
- ✓ Secure tightening
- ✓ Tightness ensured by screwing
- ✓ Vacuum bag self-perforation

TECHNICAL INFORMATION

- ✓ Base: 65 mm in diameter
- ✓ Thread: 1/4 gas
- ✓ Using temperature: 230°C

OPTION

- ✓ Connector

	References				Material		Information
	A5QVP	65mm	200°C	10Bars	Aluminium	1/4	QRC Brass
	A5QVPX	65mm	230°C	10Bars	Aluminium	1/4	QRC Stainless Steel

VACUUM PLUG

A5QVPSD50

DESCRIPTION

This Aeroform A5QVPSD50 vacuum plug is composed of 2 pieces.

A silicone seal placed between the two parts ensures the tightness of your vacuum.

This vacuum plug is used in high temperature enclosures up to 230 ° C.

A QRC (Quick Release Coupling) 1/4 gas can be provided with the vacuum plug *.

**upon request*



IDEAL FOR

- ✓ Autoclave
- ✓ Oven
- ✓ Hot Bonder



ADVANTAGES

- ✓ Easy to set up
- ✓ Simple and economical design
- ✓ Tightness ensured by screwing
- ✓ Secure tightening



TECHNICAL INFORMATION

- ✓ Base: 50 mm in diameter
- ✓ Thread: 1/4 gas
- ✓ Using temperature: 230°



OPTION

- ✓ Connector

References with QRCs

	References				Material		Information
	A5QVPS	50mm	200°C	10Bars	Steel	1/4	QRC Brass
	A5QVPSX	50mm	230°C	10Bars	Steel	1/4	QRC Stainless Steel